

For Topaz Signature Pads

# Wireless Signature Pad

For T-LBK750, T-LBK755, T-LBK766, T-LBK57GC Models & SE Versions

## CONNECTION AND COMMUNICATION


The Topaz Wireless Pad enables Topaz -BHSB-R signature pads to be used in an environment with Wi-Fi or Bluetooth connection. Available on signature pads or sold separately for existing -BHSB-R signature pad users.

The unit works with existing Topaz software and just requires a simple Topaz Network Port Driver installer and configuration on the PC to complete the connection.

Communication with the Wireless Signature Pad is bi-directional, allowing for interactive text, graphics, and pen-tap hotspots and checkboxes, in addition to signature capture.

Serving as a virtual serial device, the Wireless Signature Pad is also compatible with remote usage (Citrix, Terminal Server, VDI environments, and more).

Data security is handled by the built-ins standard Wi-Fi and Bluetooth protocols.

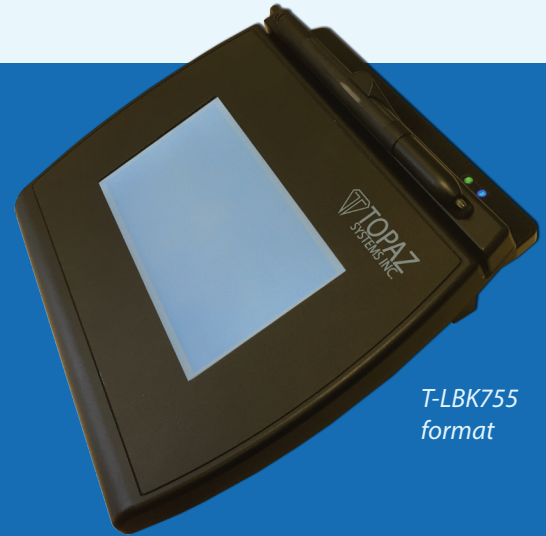

T-LBK755  
format

### Connection

Wi-Fi Enabled

**OR**

Bluetooth Enabled

### Dimensions

Thin profile

Adds 0.3" in thickness to the unit

Adds 0.5" to the back of the unit

### Resolution & Conversion Rate

Exceeds industry standards

Programmable PPI

### Authentication Capability

Forensic quality .SIG data capable of examination and authentication with Topaz software



875 Patriot Drive  
Unit A | Moorpark, CA  
93021 | USA

**P:** 805.520.8282  
**F:** 805.520.0867  
**[www.topazsystems.com](http://www.topazsystems.com)**

# Wireless Signature Pads

## BATTERY LIFE AND HOUSING INFORMATION

The Topaz Wireless Signature Pad uses a long-life thin Lithium Polymer battery, providing up to eight (8) hours of continuous use with a T-LBK766 or T-LBK57GC signature pad, or sixteen (16) hours of continuous use with a T-LBK750 or T-LBK755 signature pad.

The Wireless Signature Pad comes with a protected power switch in the rear of the unit, as well as built-in power management to allow use over several days without recharging.

## WI-FI INFORMATION

2.4-GHz IEEE 802.11b (2Mbps)

Output Power Level (class 1) +18 dBm

Rx Input Sensitivity -85 dB


Authentication/encryption schemes: WPA-PSK (TKIP), or WPA2-PSK (AES128), WEP-128 is not supported

## BLUETOOTH INFORMATION

2.4-GHz Bluetooth 2.1 + EDR

Output Power Level (class 1) +18 dBm

Rx Input Sensitivity -85 dB

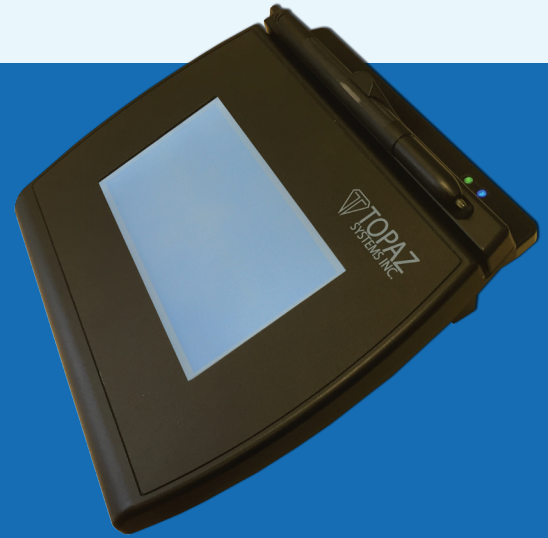

### Wi-Fi Connection Guide

[www.topazsystems.com/wifiguide](http://www.topazsystems.com/wifiguide)

### Bluetooth Connection Guide

[www.topazsystems.com/bluetoothguide](http://www.topazsystems.com/bluetoothguide)

### Complete Software Collection

[www.topazsystems.com/software](http://www.topazsystems.com/software)

### Remote Usage Options

Citrix, Terminal Server, and VDI environments

